


Mini Turbine Flow Sensor

Flow Sensor	FS100A
Working Voltage	DC4.5V--DC24V
Max pressure	<17.5 bar
Working pressure	0 ~ 10.0 bar
Max Rated Current	8mA
Withstand Current	15mA
Working Temperature	Below 10 °C ~ 120 °C
Storage temperature	Bellow zero 25 ~ 65 °C
Flowrange	0.15-2.5L/Min
Accuracy	±0.5%
Pulse output high electrical level	>DC 4.5 V (Input voltage DC 5 V)
Pulse output low electrical level	<DC 0.5 V (Input voltageDC 5 V)
Pulse output proportion	50±10%
Inlet Pipe size	2mm
Output Pipe size	4mm
Pulse Number	3900pules/Litre
Humidity	35%--90%
Material :	POM

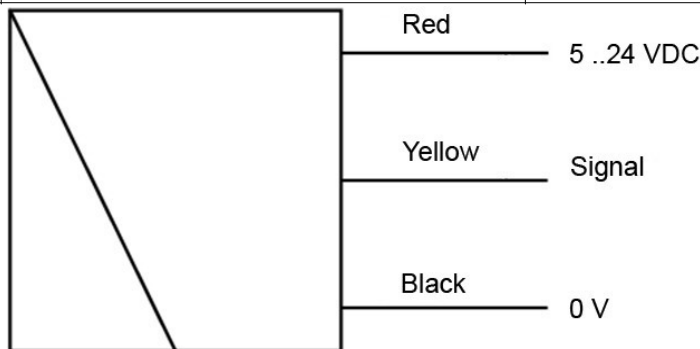

Warning : This Meter has low-Friction bearings .

Do not at any time test operation of the meter with compressed air

Doning so will Subject it to rotational speeds many times those for which it was designed ,and will cerainly damage the rotor ,shaft or bearings

Application:

- 1.Coffee Vending Machine,Water Dispenser ,beverage vending machines, digital vending machine such as beverage vending machine,automatic vending machine,coffee vending machine, tea vending machine, hot vending machine ,cold vending machine, soup vending machine and water dispanser
- 2.Drink fountains,water purifier,water circuit ,as well as Ultra-low-flow control ystem
- 3.Wash hand ,clean boday ,bathroom ,Shower ,Water saving and so on

Real photoes

